

RECOMMENDATIONS FOR THIS PRODUCT

ESTOL-Ultra-Clean
(bitumen cleanser)



ESTOL-Setting Accelerator
for Bausion-Flex



ESTOL-Special Primer



ESTOL-Roof Varnish



SÜDDEUTSCHE TEERINDUSTRIE
GMBH & CO KG · MALSCH



SÜDDEUTSCHE TEERINDUSTRIE GMBH & CO. KG
OTTO-ECKERLE-STRASSE 7-11 • 76316 MALSCH

PHONE +49 72 46 91 16 -0
FAX +49 72 46 91 16 -70

INFO@STM-MALSCH.DE
WWW.STM-MALSCH.DE

STRUCTURAL PRESERVATION


BAUSION-FLEX / BAUSION-ELASTIC

APPLICATION

Bausion-Flex and Bausion-Elastic are the perfect roof coating, for instance for garden houses and garages.

Bausion-Flex and Bausion-Elastic are also suitable for repairing and maintaining bituminous sealed surfaces.

These include flat roofs, wall connections and building transitions in particular.

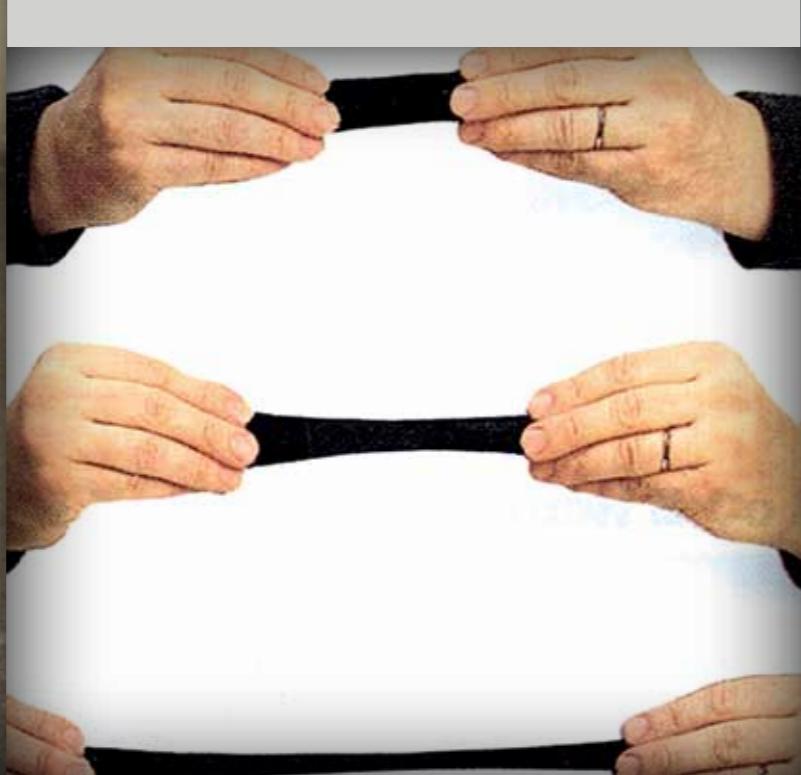

countless developments that have been tested through and through, upcoming construction projects will be handled reliably with a high level of competence. Clients from all over the Federal Republic of Germany, as well as from neighbouring European countries, have confidence in our experienced employees and excellent products. STM stands for fair partnership with maximum performance for our clients.

PROPERTIES

Bausion-Flex is a bitumen-latex emulsion and thereby environmentally friendly. It does not contain solvents and is therefore safe to use in closed spaces, however it is not meant for use inside living areas.

Bausion-Elastic contains solvents and can also be used during the winter months.

When fully dried, Bausion-Flex and Bausion-Elastic are waterproof and resistant to cold and heat.

Bausion-Flex and Bausion-Elastic reliably protect your structure from wetness and other weather effects, stagnant and seeping water as well as condensation and soil moisture.

It's easy to bridge any resulting cracks when Bausion-Flex or Bausion-Elastic is used with a fleece inlay.


BAUSION-FLEX / BAUSION-ELASTIC

After having been mixed, Bausion-Flex and Bausion-Elastic are applied and evenly distributed on the damaged area using either a soft brush, roller, wide brush or spraying device.

Bausion-Flex and Bausion-Elastic are applied in two applications.

A fleece inlay is required for particularly stressed areas and areas that are at risk of cracking. After a drying time of 12-15 hours per coating, the overall coat is weatherproof.

Dried Bausion-Flex and Bausion-Elastic can be removed using ESTOL-Ultra-Clean, gasoline, turpentine or similar solvents.

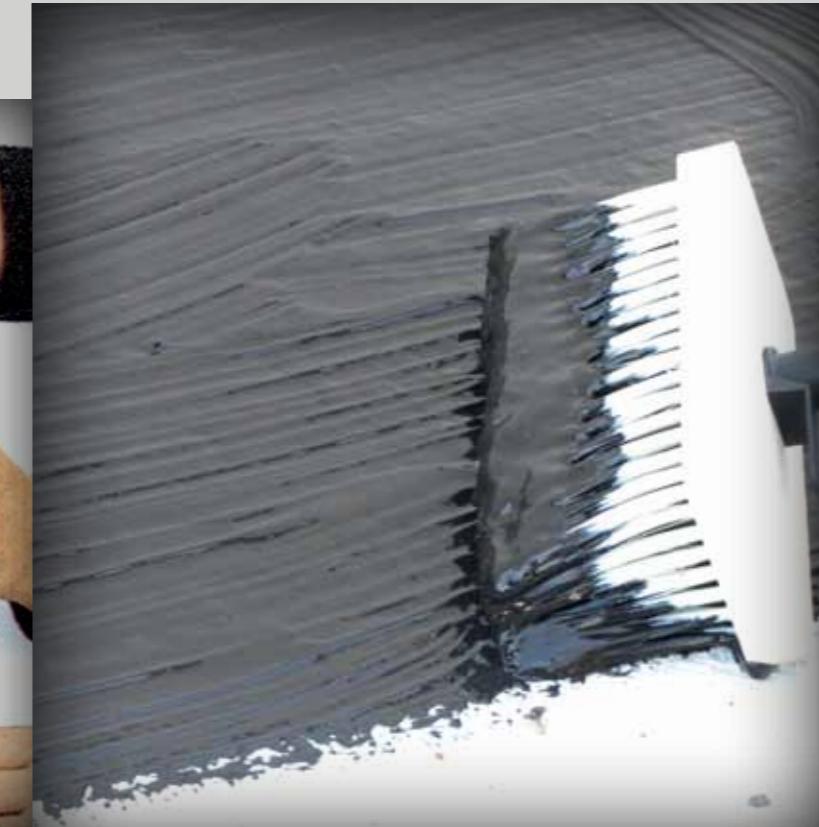

SUPPLY/STORAGE

Bausion-Flex is available in 10 kg and 30 kg containers. 42 and/or 16 containers are packed onto one pallet.

Bausion-Flex can be stored for a maximum period of up to six months and must be stored in a frost-free environment in its unopened original container.

Bausion-Elastic is available in 5 kg, 10 kg and 30 kg containers. 56, 42 and/or 16 containers are packed onto one pallet.

Bausion-Elastic is frost-tolerant and can be stored in its original container for up to one year. Keep the container firmly closed and store in a well-ventilated location away from open flame and sources of heat.

Find more information on our website at www.stm-malsch.de.

We are happy to send you a free, no-obligation quote and our technical data sheets. These data sheets will provide you with more data and information about how our products are processed.



What our company is all about

Many streets and buildings are deteriorating under the effects of climate and traffic, which can initiate wear-out and lead to destruction over the course of time. This process can be countered with the right repair and renovation measures, which enhance structural integrity in a way that satisfies safety and order regulations. Süddeutsche Teerindustrie GmbH & Co. KG has been working on technologies to perfect street renovation for over 100 years. Based on

