

RECOMMENDATIONS FOR THIS PRODUCT



SÜDDEUTSCHE TEERINDUSTRIE
GMBH & CO KG · MALSCH

ESTOL-Ultra-Clean
(bitumen cleaner)




ESTOL-Adhesive



Makabit® 82 Super



ESTOL-Biomak

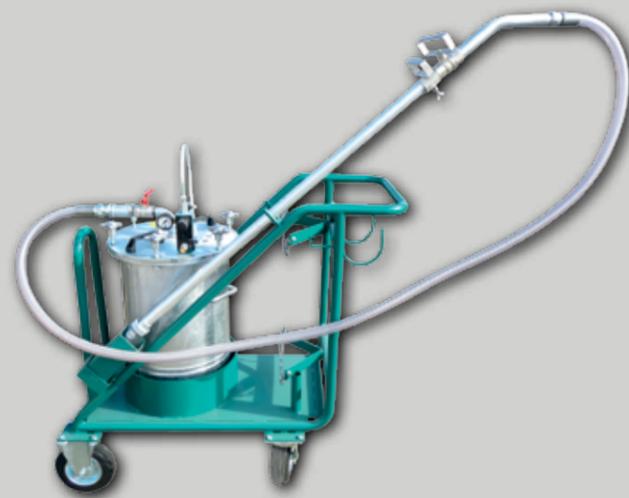

ESTOL-Rapid Device



SÜDDEUTSCHE TEERINDUSTRIE GMBH & CO. KG
OTTO-ECKERLE-STRASSE 7-11 • 76316 MALSCH

PHONE +49 72 46 91 16 -0
FAX +49 72 46 91 16 -70

INFO@STM-MALSCH.DE
WWW.STM-MALSCH.DE

ROAD CONSTRUCTION PRODUCTS

ESTOL - CONTACT ADHESIVE D

APPLICATION

Joins all connection seams in asphalt surfaces and landfill construction.

Creates watertight and voltage by-passing connections between old asphalt layers and new layers that are to be constructed.

PROPERTIES

ESTOL Contact Adhesive D comes ready-to-use in a container and is cold workable.

The viscose bitumen solution is polymer-modified.

The material has excellent water stability.

The usage of ESTOL-Contact Adhesive D is about 30 g/m and cm cutting edge height.

ESTOL-Contact Adhesive D is a safe and economic alternative to joint tape.

The water impermeability is confirmed by the IFM-Rottweil test certificate.

The material withstands tensile stress.

Milled edges are securely sealed with ESTOL-Contact Adhesive D.

INSTALLATION

ESTOL-Contact Adhesive D does not have to be stirred before use.

Seam edges should be dry and mostly dust-free. Prime with ESTOL-C40BF1-S if necessary.

Apply ESTOL-Contact Adhesive D with a brush, scraper or the ESTOL-Rapid Device, which has been designed especially for this purpose (recommended for larger building projects) fully onto the seam edge with a thickness of 3 mm.

After a ventilation period of about 15 minutes the hot mix can be installed.

SUPPLY/STORAGE

ESTOL-Contact Adhesive D is available in 25 kg containers. 16 containers are packed onto one pallet.

ESTOL-Contact Adhesive D can be stored up to one year in its unopened original container. Do not place the container in direct sunlight for extended periods of time. Store indoors in a cool, dry place; do not store outside.

Find more information on our website at www.stm-malsch.de.

We are happy to send you a free, no-obligation quote and our technical data sheets. These data sheets will provide you with more data and information about how our products are processed.



What our company is all about

Many streets and building are deteriorating under the effects of climate and traffic, which can initiate wear-out and lead to destruction over the course of time. This process can be countered with the right repair and renovation measures, which enhance structural integrity in a way that satisfies safety and order regulations. Süddeutsche Teerindustrie GmbH & Co. KG has been working on technologies to perfect street renovation for over 100 years. Based on

countless developments that have been tested through and through, upcoming construction projects will be handled reliably with a high level of competence. Clients from all over the Federal Republic of Germany, as well as from neighbouring European countries, have confidence in our experienced employees and excellent products. STM stands for fair partnership with maximum performance for our clients.

